

Job Name: _____

Type: _____


Part #: _____

Notes: _____

LLVAPX

4' & 8' Linear Vaportite with Selectable Wattage and CCT Features:

- Voltage: Universal 120~277V AC Input Range
- Wattage: Selectable - See Specs in Ordering Section
- Color Temperature: **MCT** Selectable 35/40/50K
- Wattage and Color Temp Switches are field accessible under the gear tray.
- Color Rendering Index: > 80
- High power factor electronic driver
- Power Factor: typical > 0.90, THD <20.
- Dimming: 0-10V 10%~100% (Standard).
- 130lm/W efficiency
- Ambient Operating Temperature:
 - 49°F(-45°C) ~ 113°F(45°C).
- Constant Current, Class 2

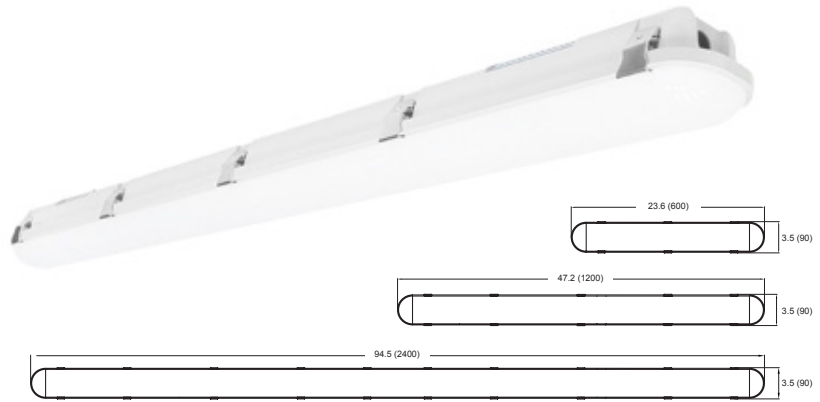

Construction & Mounting:

- Suitable for Surface Mounting. May be suspended with chains.
- Mounting Bracket Provided.
- Polycarbonate housing with painted steel tray for gear. Tool-less Access.
- Translucent Acrylic Lens - Impact Resistant.
- Stainless Steel Latches.
- Wiring knockouts at each end and on back of fixture.
- Dimensions: Length x Width x Depth
 - S (4ft) 47.2" x 3.5" x 3.1"
 - L (8ft) 94.5" x 3.5" x 3.1"

Listing:

- UL/CUL listed and labeled.
- Suitable for damp & wet locations.
- IP65 Rated
- 5 year warranty.
- ARRA compliant (optional).
- DLC (optional)



ORDERING INFORMATION

Model	Length	LED <small>Factory default inbold. lm@40k</small>	COLOR TEMP. <small>Factory default 40K</small>	Voltage	OPTIONS
LLVAPX	S- 4' Length	34.38.45W 34W /38W /45W LED 4420lm, 4940lm, 5850lm	MCT Selectable 35/40/50K	UNV	PRE(xxW.yyK) Preset Request: XX for watt, YY for CCT BU5W 5W EM Battery Backup (CEC Compliant EM) BU8W 8W EM Battery Backup (CEC Compliant EM) BU16W 16W EM Battery Backup (CEC Compliant EM) AMB Anti-Microbial Coating (Matte Skye White) DLC DLC - Contact Lumencia for details WLOCS Wet Location Occupancy Sensor <i>Additional BU and Sensor Options by Request</i>
	L- 8' Length	65.75.90W 65W /75W /90W LED 8450lm, 9750lm, 11700lm			