

LL62-17XX-5MCT

12" Wide Low Profile Fixture in 2 Lengths and 2 Finishes

Construction: Die-Cast Aluminum

Lens Material: Poly methyl methacrylate (PMMA)

Finishes: White (WH) and Black (BLK)

See Ordering Notes for Product Dimensions:

UL Listed for:

LL62-1773-5MCT-WH-24 & LL62-1783-5MCT-BLK-24:

120~277V/24W/1650-1900lm[^]/90CRI/Dimmable


• MCT: Selectable Color Temp 27K/30K/35K/40K/50K

LL62-1775-5MCT-WH-48 & LL62-1785-5MCT-BLK-48:

120~277V/47W/3450-4050lm[^]/90CRI/Dimmable

• MCT: Selectable Color Temp 27K/30K/35K/40K/50K

**Finish may effect lumen delivery*

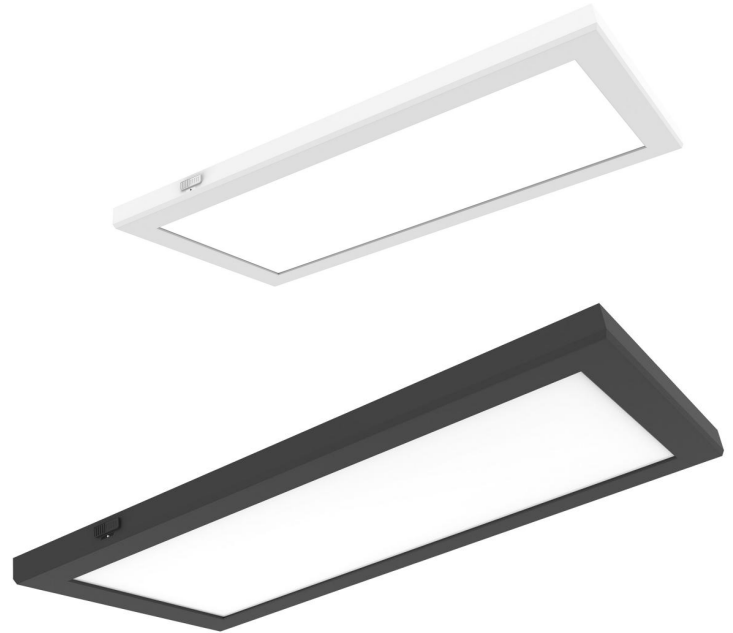

Notes/Certifications/Warranty:

- Universal Voltage 120~277V
- 120V Line Voltage Dimming (See List of Preferred Dimmers)
- Built-in surge protection - 2.5KV
- Operating Temperature: -20°C (-4°F) to a maximum of +40°C (+104°F)
- cETLus listed for Damp Locations
- Installation: Compatible with 3" & 4" J-box and pancake J-box
- Energy Star Rated
- California T24 2016 - 2022 JA8 Listed
- California T24 Listed
- RoHS Compliant
- FCC Compliant
- 50K Life Hour
- 5 Year Limited Warranty

Preferred Dimmers

Leviton: 6672, 66ELV, DDMX1, DES06-10Z, DSL06-1LZ, IPE04-1L, RNL06-10Z

Lutron: AYCL-153P, AYCL-253P, CTCL-153P, CTRP-253P, DVCL-153P, DVCL-253P, DVRP-253P, HQRA-PRO, HQRD-PRO, HRST-PRO-N, LECL-153P, MA-PRO, NTCL,250, NTRP-250, RCL-152PNL, RRD-PRO, RRST-PRO-N, SCL-153-P, ST-PRO-N, TGCL-153PH, TTCL-100H

Eaton: DUL06P-C2, RF9640-ND SUR7, TAL06PC2, VSUL06D

Legrand: RH703PTUTC, RHCL450PTC,



PART #	NOTES
LL62-1773-5MCT-WH-24	UNV 24W White Finish 1.06"H x 11.83"W x 23.70"L
LL62-1783-5MCT-BLK-24	UNV 24W Black Finish 1.06"H x 11.83"W x 23.70"L
LL62-1775-5MCT-WH-48	UNV 47W White Finish 1.06"H x 11.83"W x 47.72"L
LL62-1785-5MCT-BLK-48	UNV 47W Black Finish 1.06"H x 11.83"W x 47.72"L