

LL8642-8UTD

Ultra Thin LED Downlight

Materials:

Lens: Frosted Acrylic

Body Material: Durable Aluminium

Dimensions: 8.875"OD x 1.375" OH

Light Source: 120V/18W/1150lm Del /90CRI/Dimmable



- Available in 30K or 40K
- TRIAC or ELV Dimming 10-100%

Mounting:

- Simple installation with hinged, off-board driver/ junction box, poke-in connectors, and linkable connector cable
- Spring-loaded retention tabs hold downlight snug to ceiling surface

Notes/Certifications/Warranty:

- 120V
- 60Hz
- 120° Beam Angle
- IC Rated for Direct Contact with Batt Type Fiberglass Insulation
- cETLus Listed for Wet Locations
- Energy Star Rated
- 50K Life Hours
- 5 Year Limited Warranty on LED Light Source
- 1 Year Limited Warranty on All Other Components

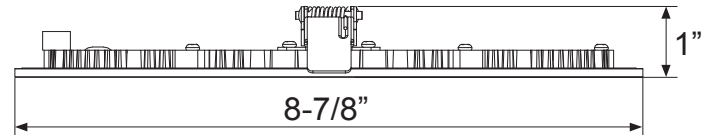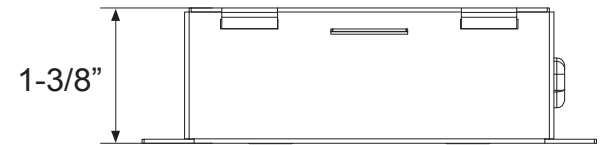

PART #

LL8642-8UTD-30K
LL8642-8UTD-40K