

LLCEU

Low Profil AI LED Exit & Emergency Thermoplastic Combo

Housing:

- Injection-molded, 5VA flame retardant, high-impact resistant, thermoplastic
- EZ snap-out chevron directional indicators.

Finish: White (WH) or Black (BLK)

Faces: Universal Single/Double Face Standard

Illumination: Red, Green or field selectable Red/Green EXIT Illumination

Electrical:

- Dual 120V/277 voltage standard. Optional dual
- Bi-Color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

Options:

- **SPV:** UL Listed for special voltage option.
- **HL:** Provides increased center-to-center spacing (2.0W per head).
- **SDT:** Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.
- **RC:** Remote capacity of up to 1.0 watts.


Warranty/Certifications:

- 5 year Limited Warranty. Battery prorated for 5 years.
- UL Listed for damp locations
- Operating Temperature: 0°C – 40°C
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.



ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)			INPUT AMPS (A)		
	120V	230V	277V	120V	230V	277V
LLCEU RG	1.2	N/A	1.2	0.12	N/A	0.12
LLCEU RG RC/HL	1.2	N/A	1.2	0.12	N/A	0.12
LLCEU RED/GREEN	1.2	1.2	1.2	0.12	0.12	0.12
LLCEU RED/GREEN RC/HL	1.2	1.2	1.2	0.12	0.12	0.12
LLCEU RED SDT	2.5	-	2.5	0.05	-	0.05
LLCEU RED SDT RC/HL	3.0	-	3.0	0.05	-	0.05
LLCEU GRN SDT RC/HL	2.7	-	2.7	0.05	-	0.05

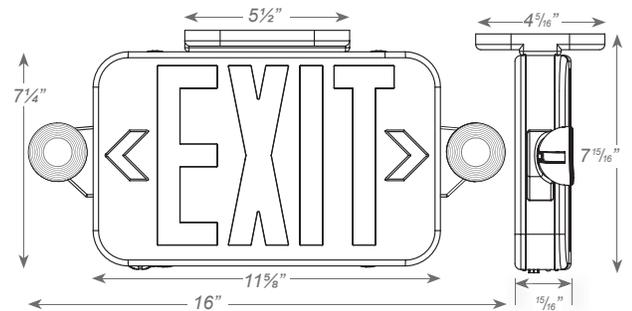


Ordering Information

Part#	Letter Color	Finish	Options
LLCEU	R: Red G: Green RGFS: Field Selectable Red/Green	WH BLK	<ul style="list-style-type: none"> • SPV: UL Listed for special voltage option. • HL: Provides increased center-to-center spacing (2.0W per head). • SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage. • RC: Remote capacity of up to 1.0 watts.

VANDAL SHIELD BG-3C


- High-Impact Resistant Polycarbonate
- Includes Mounting Hardware



Part #
BG-3C WG-3

WIRE GUARD WG-3

- Durable 9-Gauge Steel Construction.
- Includes Mounting Hardware



MRHLED

LED Mini Indoor Thermoplastic Remote Head


- Adjustable 0.5 Watt Ultra-Bright White lamp heads 1x per lamp head
- For Use With 3.6V DC Power Source (RC Option)
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic
- Finishes: White (WH) or Black (BLK)
- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage
- Suitable for wall or ceiling mount.

Warranty/Listing

- Five year warranty.
- UL Listed for Indoor Use Only
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.



DIMENSIONS

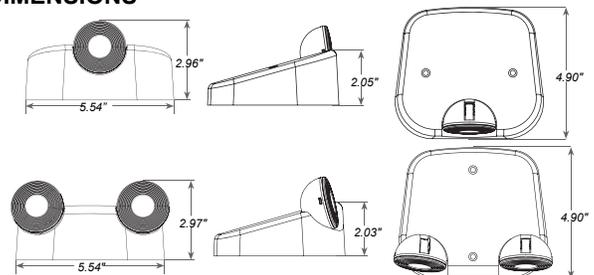

Part #	No. of Heads	Housing Color
MRHLED	1: Single Head 2: Double Head	WH BLK

RHLED

LED Mini Indoor Thermoplastic Remote Head


- For use with 3.6V, 6V, 9.6V & 12V DC Power Source
- Adjustable 1.0 watt Ultra Bright White lamp heads per lamp head
- Injection-molded, 5VA flame retardant, high-impact resistant, thermoplastic
- Finishes: White (WH) or Black (BLK)
- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Reference individual unit equipment specification sheets for remote load capacity availability.
- Suitable for wall or ceiling mount.

Warranty/Listing

- Five year warranty.
- UL Listed for Indoor Use Only
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.



DIMENSIONS

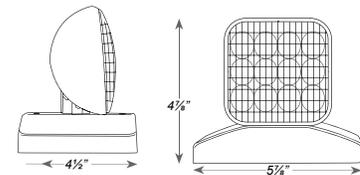

Part #	No. of Heads	Housing Color	Lamp Type	Options
RHLED	1: Single Head	WH BLK	(Blank): 1W	SDT: For Use Fixtures With A Self-Diagnostic Option

RHLED-W

LED Mini Wet Location Polycarbonate or Die-Cast Remote Head


- For use with 3.6V, 6V, 9.6V & 12V DC Power Source
- Adjustable 1.0 watt Ultra Bright White lamp heads per lamp head Available in both high-impact resistant polycarbonate or premium grade die-cast aluminum housing.
- Finishes: Gray (GRY) or Black (BLK)
- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Reference individual unit equipment specification sheets for remote load capacity availability.
- Suitable for wall or ceiling mount.

Warranty/Listing

- Five year warranty.
- UL Listed for Wet Locations
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.



DIMENSIONS



Part #	No. of Heads	Housing Material	Housing Color	Lamp Type	Options
RHLED-W	1: Single Head	PWP: Polycarbonate WP: Die-Cast	GRY BLK	(Blank): 1W (STD)	SDT: For Use Fixtures With A Self-Diagnostic Option