

LLDC160-90


14" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

Finishes: Bronze (BRZ)


Dimensions: 14.312"L x 9.062"H x 11.69"E

Notes/ Certifications/Warranty

- Universal Voltage- 120-277V Standard
- Power Factor >0.90 - THD <20
- Can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry
- Additional Conduit entries Available for Photocells & other Components
- Dark Sky
- cETLus Listed for Wet Locations
- IP-65 Rated
- Standard Operating Temperature -20°C to 40°C.
- 5 Year Warranty

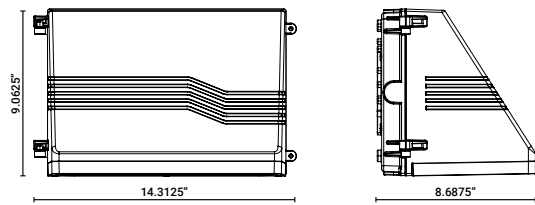

OPTICS

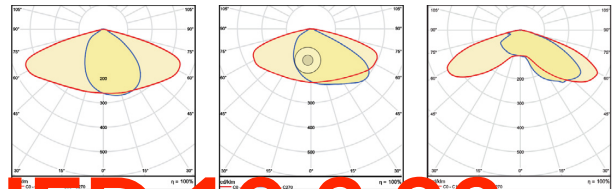

DISCONTINUED 10.2.23

Nominal Wattage	Lumens	Efficacy
40W	4,800	120
60W	7,200	120

PART #	WATTAGE	CCT	OPTICS	FINISH	OPTIONS & ACCESSORIES
LLDC160-90	40W 60w	40K 50K	T2-Type II T3-Type III T4-Type IV	BRZ-Bronze (Standard)	PC-120v-277V Photocell V1*-480/347V INPUT (120-277V Standard) <small>*NOT AVAILABLE WITH PHOTOCELL</small>

When specifying options, please check with your Lumencia rep for availability and lead time. Please note any finish other than Bronze (BRZ) is non-cancelable and nonreturnable. Any modified product, any selected options added to standard products, deem order non-cancelable and non-returnable.