


**Discontinued 10/25/2023**


**LLRT56ICA-FR**  
**Lumencia Fire Rated Housing with Two LED trim Options**  
 Airtight IC Housing, Fire Rated for 2-Hours.

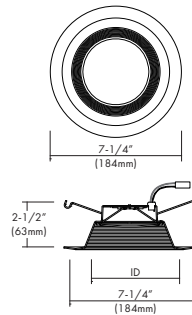

**LLFR56 6" LED Trim for Use with LLRT56ICA-FR Recessed Housing**

Available in Baffle and Smooth Trim

120V/12W/810lm TRIAC Dimming  
 Wet Location Rated

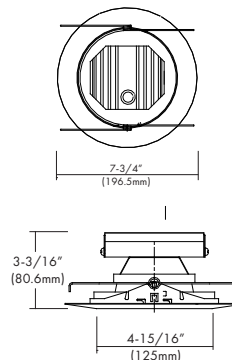

**LLAF6AD Gimbal Trim for Use with LLRT56ICA-FR Recessed Housing**

120V/12.5w/900lm TRIAC Dimming  
 Damp Location Rated  
 Only Available in White

Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

Housing	TRIM	CRI	COLOR TEMP.	FINISH	DRIVER	CONNECTOR
LLRT56ICA-FR	LLFR56	80	27K 30K 35K 40K	RWHT: White Reflector BWH: White Baffle RBLK: Black Reflector BBK: Black Baffle	DOB: 120V Driver On Board	ZE- Genderless Quick Connector <i>(Select when ordering with LEDH Housings)</i>
	LLAF6AD	90		WHT: White		

### Compatible Dimmers

**Lutron:** Diva® DVCL Series, Diva® DVLV Series, Nova T® NT Series, Glyder® GLV Series, Ariadni® AYCL Series, RadioRA 2® 10ND Series, Skylark® SLV Series, Skylark® SLV Series, Skylark® Contour CTCL Series, Maestro Wireless MRF2-6ND Series, Lutron® Homeworks® RPM-4U, Lutron® Homeworks® QS HQRD-6ND Series, Lutron® Homeworks® QS HQRD-10ND Series, Diva® DVELV Series, Nova T® NTELV Series, RadioRA RRD-6NA Series, Maestro MAELV Series, Maestro MRF2-6ELV Series, Skylark® SELV Series, Lutron® Grafik Eye PHPM-PA Series, Lutron® Homeworks® QS HQRD-6NA Series

**Leviton:** SureSlide 6633

#### LLRT56ICA-FR

Galvanized Steel with Flexible Non-Combustible Insulation.

**Dimensions:** 6.5"D x 9.0"W x 12.5"E

Aperture for Can: 6.125"

Height of Can: 7.5"

#### Junction Box:

- J-box is listed for through-branch circuit wiring (4in - 4out), with three 1/2" knockouts and four non-metallic cable knockouts with strain clamps.
- 3-port quick connectors pre-installed in J-Box.

#### Bar Hanger:

- Pre-installed bar hangers allow the housing to be positioned at any point within 24" joist span
- Pre-installed captive nails on bar hangers
- Bar hangers can be turned 90° on the plaster frame
- Bar hangers are designed to fit T-bar spine without additional clamps for use in drop ceilings

#### Notes:

- Suitable for use in new construction applications
- IC Rated for direct contact with insulation
- Adjusts to accommodate up to 1-1/2" ceiling thickness
- 2-hours fire rated

#### Warranty/Certifications:

- cULus Listed for Wet Location (with specified trims)
- Certified under ASTM-E283 for Air tight construction
- 2 HOURS FIRE RATED UL Listed (UL1598 / UL263)
- 3 Year Limited Warranty



#### LLFR56

#### 120VAC LED DoB Recessed Trim

**Dimensions:** 7.74"OD x 3.1875"H

#### Light Source:

- 120V/12W/810lm
- 80 or 90 CRI
- Color Temp: 27K, 30K,35K,40K
- Beam Angle: 92.7°
- 10-100% TRIAC Dimming

#### Warranty/Certifications:

- 50K Life Hrs
- 3 year Limited Warranty
- Wet Location Rated



#### LLAF6AD

#### 120VAC LED DoB 6" Recessed Gimbal

**Dimensions:** 7.74"OD x 3.1875"H

#### Light Source:

- 120V/12.5w/900lm
- 80 or 90 CRI
- Color Temp: 27K, 30K,35K,40K
- Beam Angle: 74°
- 10-100% TRIAC Dimming

#### Notes:

- White Only
- Gimbal head rotates 358 degrees and can tilt 0 - 30°

#### Warranty/Certifications:

- 50K Life Hrs Module
- 3 year Limited Warranty
- Damp Location Rated

