

## LL62-1680-7-WH-MCT-OCS

## LL62-1681-10-WH-MCT-OCS

White LED Surface Discs in 2 sizes with a Frosted Polymer Lens and Occupancy Sensor.



### Dimensions:

**LL62-1680-7-WH-MCT-OCS:** 7.40"OD x 1.45"H

**LL62-1681-10-WH-MCT-OCS:** 9.85"OD x 1.53"H

### Light Source:

**LL62-1680-7-WH-MCT-OCS:** 120V/13w/930lm-1070lm/90CRI/Non-Dimmable

**LL62-1681-10-WH-MCT-OCS:** 120V/16w/1210lm-1325lm/90CRI/Non-Dimmable

• MCT: Selectable Color Temp 30K/40K/50K

### Notes/Certifications/Warranty:


- 120V
- Mounts to Standard Junction Box
- -35C (-31°F) to a maximum of +50°C (+122°F)
- cETLus Rated for Damp Locations
- Clothes Closet Certified - Reg:410.16 (A)(3) and 410.16 (C)(5)
- Energy Star
- Title 24 Compliant
- JA8 Listed
- FCC Compliant
- RoHS
- 50K Life Hours
- 5 Year Limited Warranty



PART #
LL62-1680-7-WH-MCT-OCS LL62-1681-10-WH-MCT-OCS

### OCCUPANCY SENSOR OPERATION

There are 3 sensor settings on the side. Use a flat screwdriver to adjust.

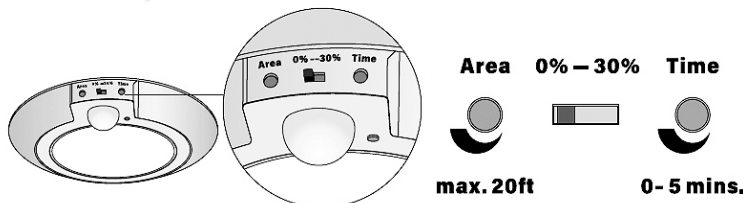

1. **Area:** Sensor activation area can be set for a diameter of 0ft to a maximum of 20ft.
2. **0% - 30%** The fixture can be set at default brightness of 0% (not lit in OFF condition) or 30% (maintain 30% of full output in OFF condition).
3. **Time:** Time options from 0 to 5 minutes for ON time after activation.

**Replaces**  
**LL62-1310-7-WH-30K-OCS,**  
**LL62-1312-7-WH-40K-OCS,**  
**LL62-1311-10-WH-30K-OCS,**  
**LL62-1313-10-WH-40K-OCS**